


HiLumz®

The Professional's LED Choice



TROVE LIGHT

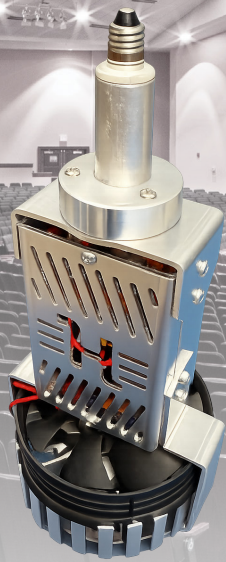

TROVE LIGHT+

LED CONVERSION KIT FOR 250 TO 500 WATT QUARTZ/
HALOGEN RECESSED CANS, CYLINDERS, AND PENDANTS



THE TROVE LIGHT IS 3RD PARTY TESTED BY INTERNATIONAL TESTING AGENCIES FOR PRODUCT LIFE, HEAT MANAGEMENT AND LIGHT PERFORMANCE.



Over
70,000
RATED HOURS

WITH THOUSANDS OF TROVE LIGHT UNITS INSTALLED AND UNDER WARRANTY, HiLUMZ DEMANDS THE HIGHEST STANDARDS OF PRODUCT QUALITY. SYSTEMS ARE DESIGNED TO FAR OUTLIVE THE WARRANTY PERIOD WITH MINIMAL LIGHT LOSS. EACH UNIT IS INDIVIDUALLY TESTED.



THE DC BARREL MINI WAS DESIGNED AND IS BUILT, TESTED, AND SERVICED BY THE HiLUMZ ENGINEERING TEAM IN ALPHARETTA, GA.

OPERATES ON LEGACY FORWARD-PHASE RACK DIMMING



TROVE LIGHT+	0.1% (1mA) dimming with smooth on/off; dual driver system
TROVE LIGHT	5% (40mA) dimming with; often good enough in a more economical package



Allows for the bypass or conversion of legacy dimming systems

TROVE HIGH-OUTPUT CAN AND CYLINDER DOWNLIGHT RETROFIT KIT

FULL COLOR SELECTION

OUR LED SELECTION TOOL ALLOWS FOR ANY KELVIN FROM 5000K (BRIGHT WHITE) TO 2200K (WARM).



REPLACES

- PAR 38
- PAR 56
- PAR 64
- PAR 46
- 175, 250, 500 WATT HALOGEN & HALOGEN QUARTZ
- METAL HALIDE
- HIGH PRESSURE SODIUM



CYLINDER KITS

DIM TO WARM

ALLOWS FOR LIGHTING COLOR TO SHIFT WARM AS IT DIMS, CREATING A SUNSET/SUNRISE COLORSCAPE.

FULL MOUNTING SOLUTIONS

- E11 MINI CANDELABRAS
- E26 MEDIUM BASE
- BAYONET BASE
- TRIM KIT
- DIRECT WIRE PLATE MOUNT

OPTICAL CONTROL

- 16 = 16° (REFLECTOR)
- 25 = 25° (REFLECTOR)
- 49 = 49° (REFLECTOR)
- 65 = 65° (REFLECTOR)
- 91 = 91° (REFLECTOR)
- Z = 180° BULB LENS

