


OVERVIEW

30W- replace 150 to 175W
60W - replace 250W

Never struggle with replacing wallpacks again. Long lasting, plug & play installation to turn any medium or large wall pack to a high power LED system.

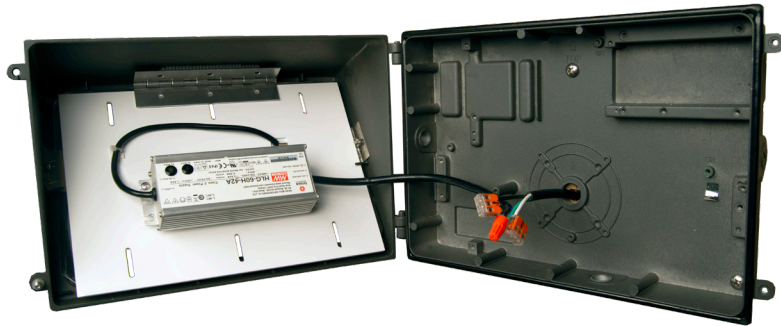

FEATURES

- 130+ Lumens/Watt out of fixture
- 0-10V dimming
- <10 minute install
- >25 minutes to replace fixture
- 3000K, 4000K, 5000K
- Excellent thermals


Fast Delivery
Made in America

APPLICATION


- Mounting uniquely designed by HiLumz Engineers for light performance.
- Piano hinge attached using 3M adhesive above diffuser to let gravity swing the light unit at a downward angle facing the ground.
- Positioning of LED and white plate pushes light out of diffuser with optometry consistent with wall pack original design.



PERFORMANCE SPECIFICATIONS

Product	Wattage	Replaces	Lumens	CRI	Voltage	Dimensions	Op Temp
DWP	30 rated 25 input	75-175W	5000k; 4,100 4000k; 3,900 3000k; 3,600	80+	100-277V	 <p>Length: 11.75" Height: 8.25" Width: 2.0" (including driver)</p>	-40°C +60°C
	60 rated 56 input	175-350W	5000k; 7,400 4000k; 7,200 3000k; 6,600				

* For a 120W LED system to replace 400W Metal Halide, refer to HiLumz DM120.

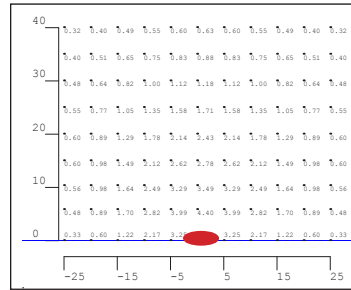

Photometrics; 60W @ 20ft
Distance in feet
Beam Angle: 113.4° (V) / 92.2° (H)



ORDERING

EXAMPLE **DWP-60-5080-HP-N**: 40 watt wall pack cartridge unit at 5000K, 80 CRI

Product	Wattage	Color	CRI	Mounting
DWP	30 60	50 = 5000K 40 = 4000K 30 = 3000K	80	HP - Hinge Plate

DLC Naming:

30 Watt: DC30-5080

60 Watt: DWP-60-5080-HP

HILUMZ USA

1335 Ridgeland Parkway
Suite 150
Alpharetta, GA 30004

sales@hilumzusa.com
678-867-9200
hilumzusa.com