




—OVERVIEW

- ✓ **Unique Solution**
- ✓ **Adhesive Based System to Mount in any Fixture**
- ✓ **Field Adjustable Kit**
- ✓ **Line Dimming Optional**

Asymmetrical uplights are a popular product for uplighting high ceilings. The HiLumz AU, asymmetric uplight conversion kit, is easy to install and provides all the benefits of a new LED fixture.

—APPLICATION

- Elliptipar® style retrofit kit.
- Pin LED lamps are ineffective with poor heat management.
- The HiLumz Asymmetric kit provides excellent light output with a wide distribution and mounts directly to the lens.
- Installation includes removing adhesive tape cover, pressing to glass, then direct wiring to incoming AC line.
- Should be installed by a certified electrician
- 120-277VAC input
- 150 lumens per watt
- Driver mounted to kit
- 80+ CRI

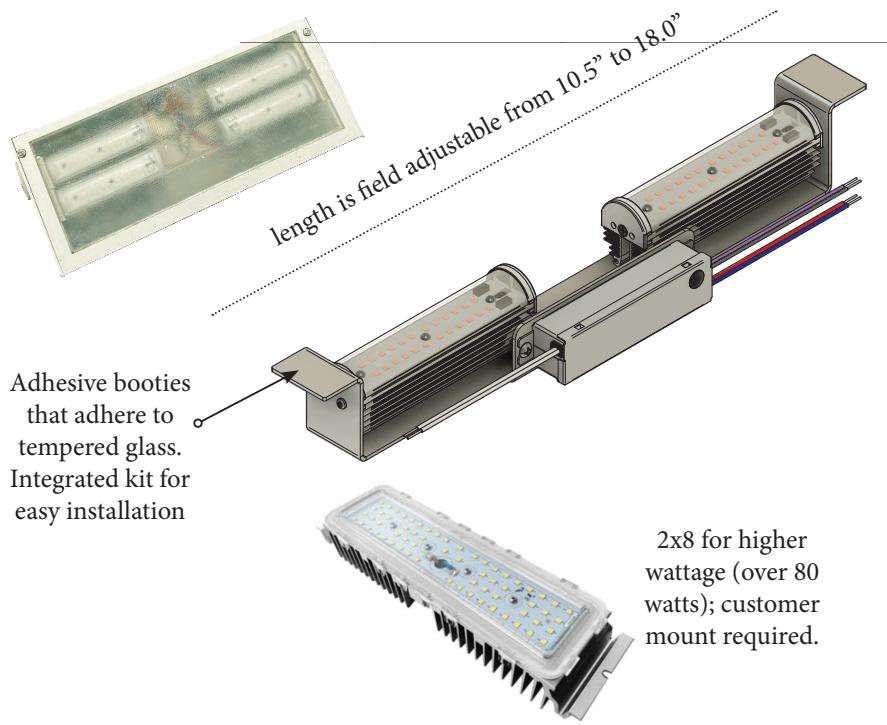

—ORDERING

EXAMPLE **HLAU-3580-40-A-C-S:** Two, 35K light engines for a total of 40 Watts, adhesive mount, clear lens

| Product | Color/CCT | Wattage | Mount | Diffusor | Dimming |
|---------|-----------|-----------------|-----------------------|--------------------------|-------------------------------|
| HLAU | 2280 | 20 (1 or 2 bar) | A (adhesive to glass) | C (clear) | S (standard, 0-10V) |
| | 2780 | 25 (2 bar) | CSTM (custom) | D (diffused, pixel free) | T (triac - 120V line voltage) |
| | 3080 | 40 (2 or 4 bar) | | | |
| | 3580 | 60 (4 bar) | | | |
| | 4080 | 80 (4 bar) | | | |
| | 5080 | 135 (2, 2x8) | | | |