


40, 75, 100, 120, 150, 200, 240, 300 WATT  
AREA LIGHT SYSTEM



MODERN SEAGULL-CURVE DESIGN  
UNIFORM LIGHT (AMBER, 3K, 4K, 5K)  
FIELD SERVICEABLE  
HIGH END COMPONENTS  
THERMALLY PROVEN

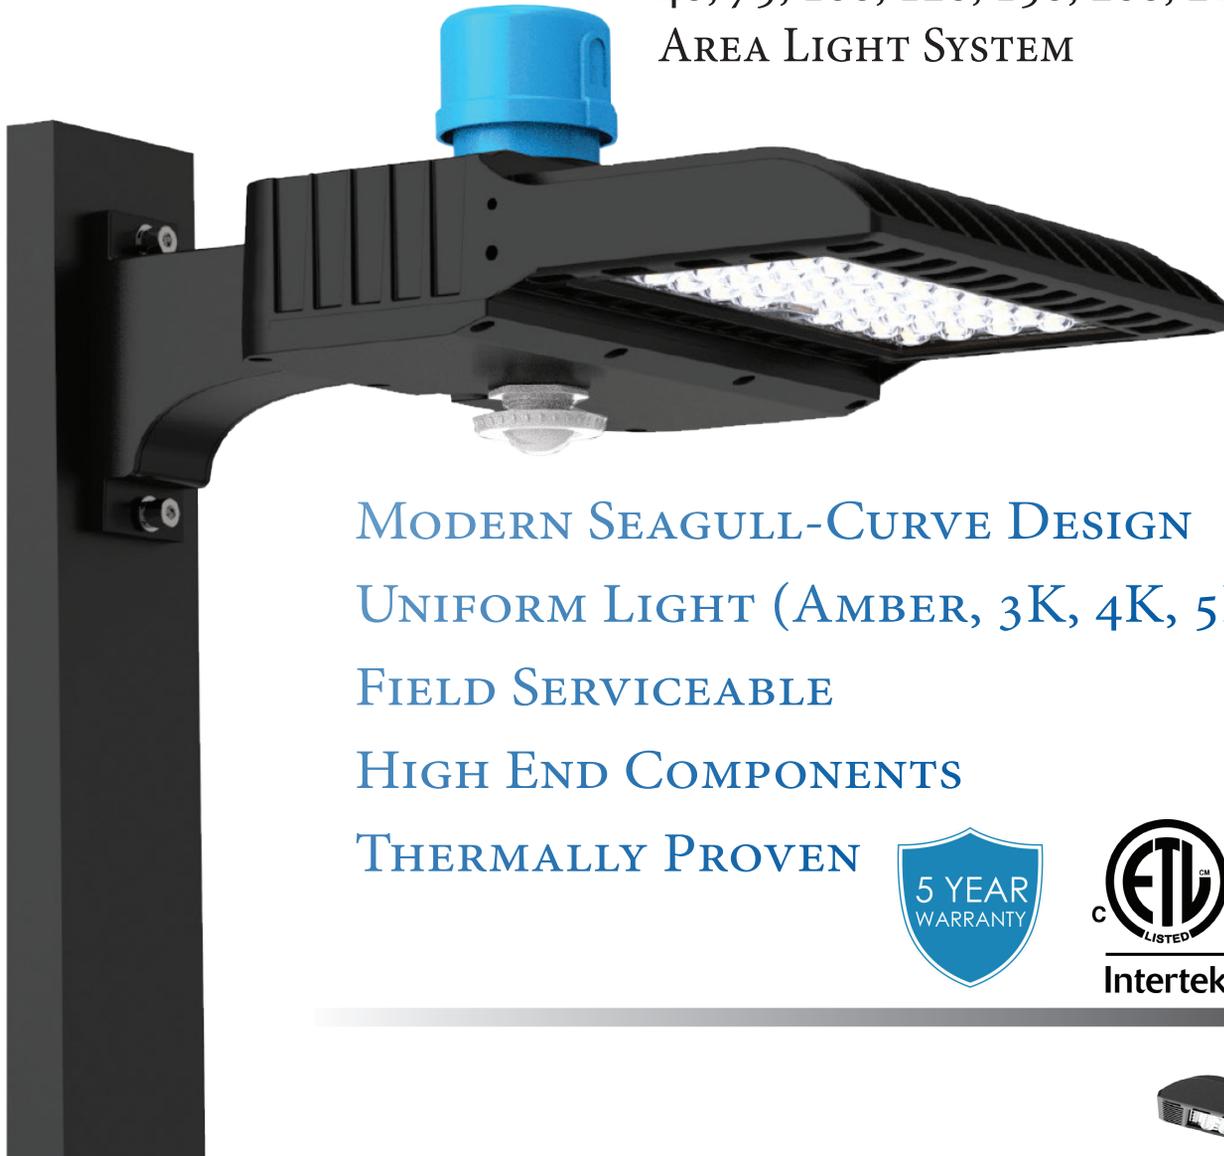

A great light module with excellent thermal management and 4-part stacks of 3030 Lumiled LEDs for each, large and efficient optics. All units are stocked to accept a photocell and motion controls. Built in Alpharetta, GA with local customization to meet any specification, the NightShine Mini+ is an excellent area light or flood light.

- *Rugged and simple “one-person install” system*
- *Excellent maintenance and USA warranty support*
- *Highly serviceable*
- *Built on-demand to your specification*



TYPE IV STANDARD FOR  
LIMITED BACKLIGHT AND  
FORWARD THROW.

OPTICAL CHOICES

BREATHING VALVE FOR HEAT  
PRESSURE RELEASE.

RELIABLE AND UNIVERSAL



## PERFORMANCE

PRODUCT	WATTAGE	REPLACES	LUMENS, 5000K*	VOLTAGE	CRI	OP TEMP
HLAR03	40	100W-250W	5,800	100-277V, 270-480V	74+	-40°C +55°C
	75	250W-350W	10,500			
	100	250W-400W	14,100			
	120	250W-400W	16,560			
	150	400W	20,250			
	200	400W-600W	28,200			
	240	750W-1000W	33,400			
	300	1000W	41,500			

\* 5000K LUMEN OUTPUT TIMES 0.97 FACTOR FOR 4000K

\* 5000K LUMEN OUTPUT TIME 0.94 FACTOR FOR 3000K

*T<sub>2/3/4/5</sub> OPTICAL DISTRIBUTION*  
 PHOTOMETRIC SERVICES AVAILABLE

## ORDERING

EXAMPLE **HLAR03-120-U-40K-4-B-SF**: 120 watt unit, 120-277V at 4000K, with T4 optics and slip fitter mount

SKU	WATTAGE	VOLTAGE	CCT	OPTICS	FIXTURE COLOR	MOUNTING	CONTROLS	SHIELD
HLAR03	40 75 100 120 150 200 240 300	U (120-277) H (277-480)	50K 5000K 40K 4000K 30K 3000K Amber*	2 T2 3 T3 4 T4 5 T5	D Dark Bronze** B Black W White* Other	S/RP Pole Mount (square or round) TRU Trunnion SF Slip Fitter	N None P Photocell P2 Smart Photocell M Motion C Surge	SH1 House side SH2 4-side drop

\* Available with consultation

\*\* Primary stock

## HiLUMZ USA

1335 Ridgeland Parkway  
 Suite 150  
 Alpharetta, GA 30004


sales@hilumzusa.com  
 678-867-9200  
 HiLumzPRO.com

**1. SELECT OUTPUT** FROM 5,800 TO 41,500 LUMENS

**BUILD YOUR FIXTURE**


**MINI**

<b>Weight - 40 to 150 Watt</b>	
Light System /including mount	11.5 lbs / 13.7 lbs
<b>EPA</b>	
Single Head	0.36
Dual Head	0.72
Tri-Head	0.98

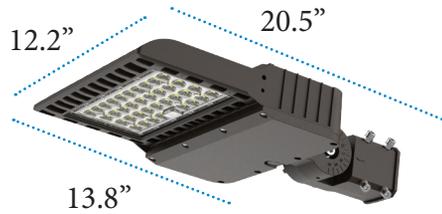

**MINI+**

<b>Weight - 200 to 300 Watt</b>	
Light System /including mount	20.0 lbs / 21.1 lbs
<b>EPA</b>	
Single Head	0.48
Dual Head	0.96
Tri-Head	1.44

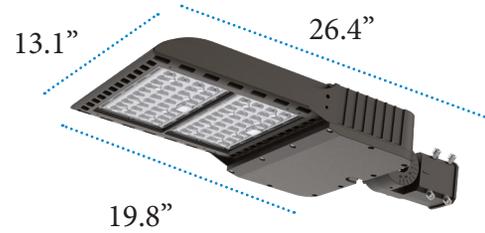


**2. SELECT FEATURES**

INPUT VOLTAGE

120-277VAC  
480VAC

OPTIC

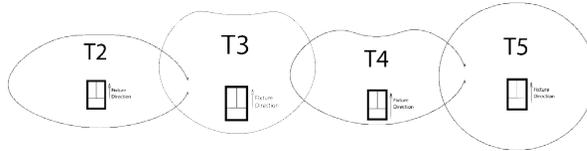


CCT/COLOR



**3. SELECT A MOUNT**

SQUARE/ROUND POLE MOUNT



SLIP FITTER



TRUNNION



**4. SELECT CONTROLS**

PHOTOCELL



MOTION/PIR



SURGE PROTECTION



SH1 HOUSE SHIELD

