


APPLICATION



5.5" LENGTH
11" LENGTH
22" LENGTH
44" LENGTH

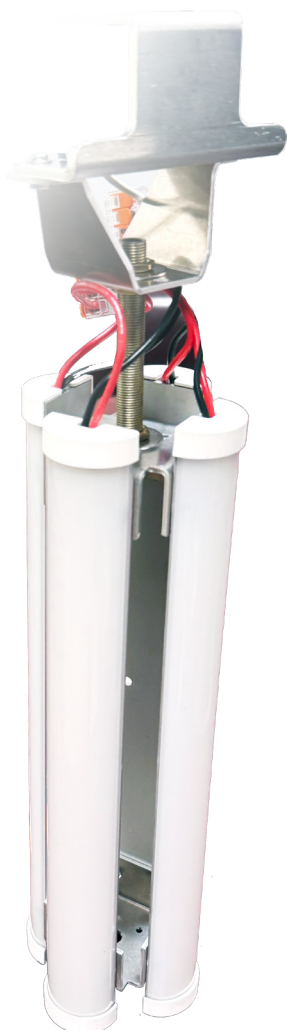

3.25" DIAMETER

FEATURES

QUALITY LIGHTING

- Operating Temperature: -40° F to 135° F (57° C)
- Highly efficient latest generation LEDs
- Flicker-free, hum-free, buzz-free
- 140+ (up to 170) Lumens/Watt
- L70 over 120,000 hours



DIMMING AND CONTROLS CAPABILITY

- Compability with wired and wireless controls
- 2200K to 5000K
- 0-10v constant curve; Triac (line voltage)

MOUNTING OPTIONS

- HiLumz team has strong installation experience and can help provide the best mounting brackets, threaded rod, socket screw in option for your fixture.
- Quick turn if custom bracket is required

ORDERING

EXAMPLE **PK22-30-4080-1T-V2** : Pendant Kit, 22" length light bars, 30 Watts, 4000K, 80+CRI, Triac dimming driver, e26

PRODUCT	WATTAGE	COLOR/CRI	DRIVER	MOUNT
PK05 (5.5")	05: 10, 20	2200	1D = 120-277V	V2 = E26 Screw In
PK11 (11")	11: 20, 30	2700	1T = 120-277V Triac	TR = Threaded Rod
PK22 (22")	22: 20, 30, 40	3000	DX = DMX Direct	Custom *
PK44 (44")	44: 20, 30, 40, 60	3500	AX = 12V auxilary power	
		4000	with 0-10V dimming	
		5000		

* Contact HiLumz. Offered with a variety of plate and bracket mount options

External drivers unless otherwise specified.

HILUMZ USA

6835 Shiloh Rd E, C8
Alpharetta, GA 30005
sales@hilumzusa.com
678-867-9200
hilumzusa.com