


## OVERVIEW

**30W- replace 150 to 175W**  
**60W - replace 250W**

Never struggle with replacing wallpacks again. Long lasting, plug & play installation to turn any medium or large wall pack to a high power LED system.

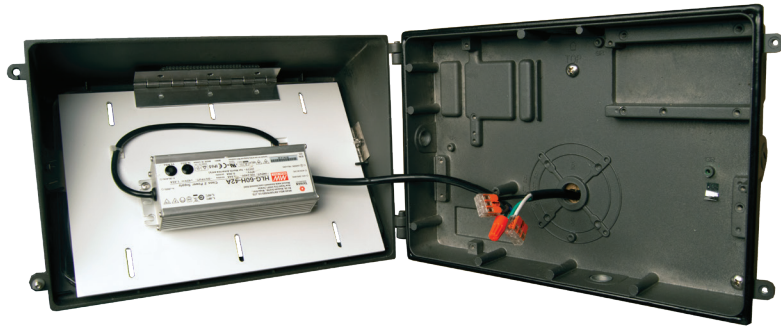

## FEATURES

- 130+ Lumens/Watt out of fixture
- 0-10V dimming
- <10 minute install
- >25 minutes to replace fixture
- 3000K, 4000K, 5000K
- Excellent thermals


**Fast Delivery**  
**Made in America**

## APPLICATION


- Mounting uniquely designed by HiLumz Engineers for light performance.
- Piano hinge attached using 3M adhesive above diffuser to let gravity swing the light unit at a downward angle facing the ground.
- Positioning of LED and white plate pushes light out of diffuser with optometry consistent with wall pack original design.



## PERFORMANCE SPECIFICATIONS

Product	Wattage	Replaces	Lumens	CRI	Voltage	Dimensions	Op Temp
DWP	30 rated 25 input	75-175W	5000k; 4,100 4000k; 3,900 3000k; 3,600	80+	100-277V	 <p>Length: 11.75" Height: 8.25" Width: 2.0" (including driver)</p>	-40°C +60°C
	60 rated 56 input	175-350W	5000k; 7,400 4000k; 7,200 3000k; 6,600				

\* For a 120W LED system to replace 400W Metal Halide, refer to HiLumz DM120.

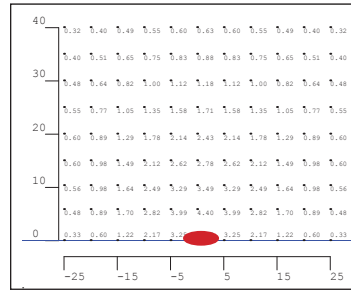

Photometrics; 60W @ 20ft  
Distance in feet  
Beam Angle: 113.4° (V) / 92.2° (H)



## ORDERING

EXAMPLE **DWP-60-5080-1N-HP-N**: 40 watt wall pack cartridge unit at 5000K, 80 CRI, 120-277VAC input

Product	Wattage	Color	CRI	Voltage	Mounting
DWP	30 60	50 = 5000K 40 = 4000K 30 = 3000K	80	1N = 120-277V 2N = 480V	HP - Hinge Plate

DLC Naming:

30 Watt: DC30-5080

60 Watt: DWP-60-5080-HP

## HILUMZ USA

1335 Ridgeland Parkway  
Suite 150  
Alpharetta, GA 30004

sales@hilumzusa.com  
678-867-9200  
hilumzusa.com